


NOVEMBER 30, 1984

NO. 66M1-25 & -50 CONNECTING BLOCKS

SEE RATINGS
BELOW

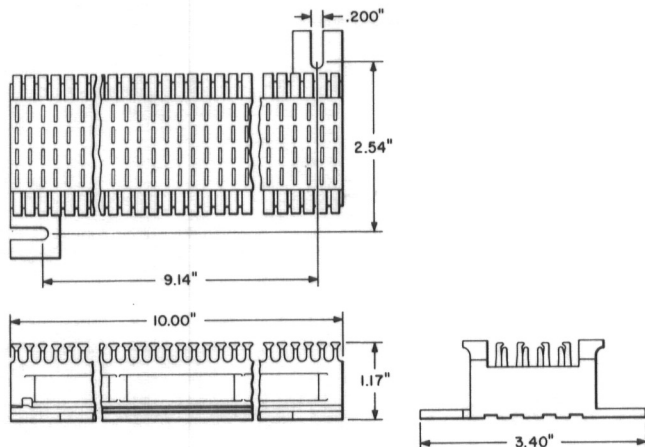

NO. 66M1-50

(ALSO GENERAL DESIGN AND DIMENSION OF NO. 66M1-25)

Consists of a molded plastic block containing quick-connect terminals, for terminating No. 20 through 24 AWG polyethylene or polyvinyl chloride insulated conductors, without removal of conductor insulation, by means of a No. 714B tool.

No. 66M1-25: Contains 50 rows of single "4-clip" terminals, each terminal of which permits the connection of up to four conductors. Equipped with a wire fanning strip on one side of the block.

Initial use: Termination in Station Systems.

No. 66M1-50: Contains 50 rows of two "2-clip" terminals, each terminal of which permits the connection of up to two conductors. Equipped with a wire fanning strip on each side of the block.

Intended for use in wire-terminating arrangements of cables and key telephone systems.

Code No.	Comcode	Rating
66M1-25	101 931 269	A.T.&T.Co.Std.
66M1-50	101 238 178	" "